


# Kompozitní hadice pro paliva ALFAOIL 6J511EN, 10bar, EN13765, elektrostaticky vodivá

↔		↔		⌚	⤴		⌋⌌	⬛			
mm	inch	mm	inch	bar	psi	mm	inch	%	kg/m	lb/ft	
25	1	37	1,46	10	150	100	4,00	90	1,300	0,873	
40	1 1/2	52	2,05	10	150	140	5,50	90	2,000	1,343	
50	2	61	2,40	10	150	150	6,00	90	2,100	1,410	
65	2 5/8	88	3,46	10	150	175	6,00	90	2,200	1,477	
80	3 1/8	93	3,66	10	150	250	10,00	90	2,700	1,810	
100	4	119	4,69	10	150	350	14	90	4,000	2,666	
NA		LA		NEU		EMEA		SA		AP AU	

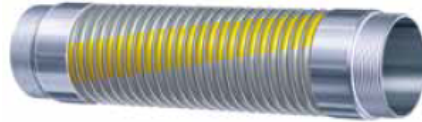

## 6J511 EN

**Fuel-oil S&D 10 bar (150 psi) - standard duty  
EN 13765 arrêté TMD**

**Inner wire:** Galvanised steel wire

**Tube:** Polypropylene film

**Cover:** Grey PVC coated fabric with longitudinal yellow stripe

**Outer wire:** Galvanised steel wire

**Use:** Fuel and oil suction and delivery.

Specialy designed for tank truck applications

**Safety factor:** 4:1

**Temperature:** -30 °C +80 °C (-22 °F +176 °F)

**Electrical Conductivity:** Ensured by the 2 wires in contact with fittings

**Electrical Resistance:** ≤ 2.5 Ohm/mt up to DN 50mm (2");

≤ 1 Ohm/mt over DN 50mm (2")